


500A

1/2 TON DIRECT AIR HOT STAMPING PRESS

FEATURES

- Solid State Dwell and Temperature Controls
- Totalizing Counter with Reset
- Micrometer-Style Depth Stop
- Rugged Construction for Commercial/Industrial Use
- Two hand "Lite-Touch" Hand Switches for Reduced Operator Fatigue

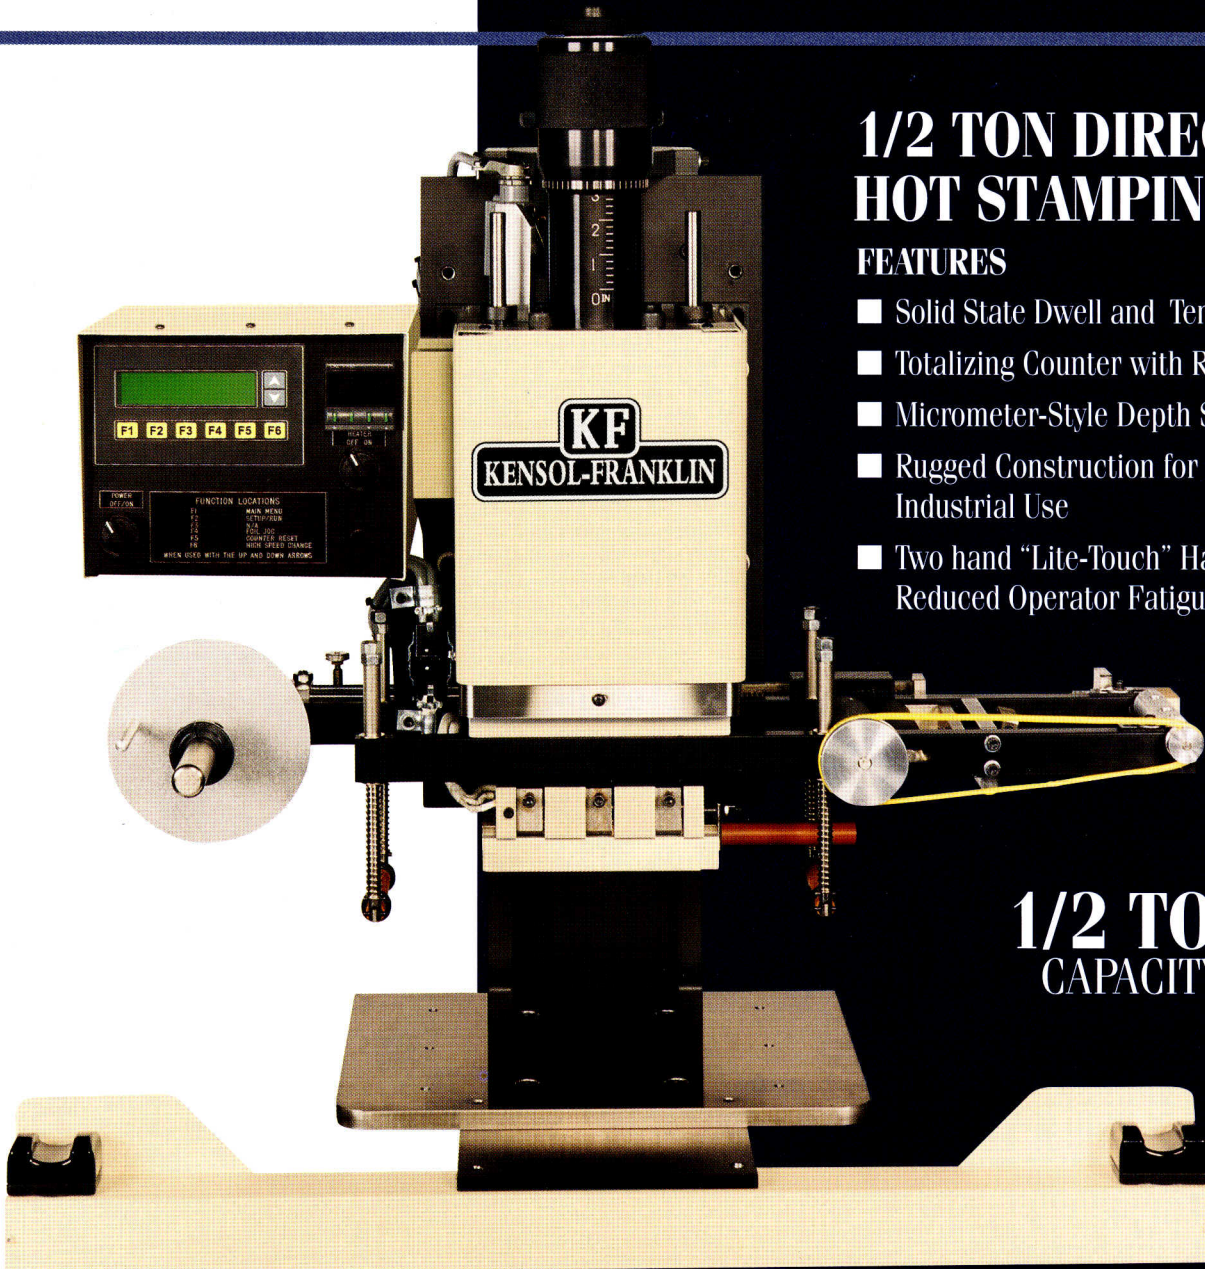

**1/2 TON
CAPACITY**

KF
KENSOL-FRANKLIN

HOT STAMPING MACHINES

KF500A

DIRECT AIR HOT STAMPING PRESS

SPECIFICATIONS

Max Opening Under Head:	10"
Hot Stamps Items up to:	7"
Overall Height:	40"
Net Weight:	220 lbs.
Head Stroke:	0 - 3" Standard
Throat Depth:	7.25"
Pressure Range:	0 - 1/2 Ton (.5 Ton)
Foil Advance:	Air Operated
Heat Control:	Solid State Analog
Standard Head Sizes:	2" x 4" - 350 Watts 3" x 6" - 700 Watts
Dwell Control:	Solid State Analog
Actuation:	Simultaneous Lite-Touch Anti-Tie Down 2 Hand Buttons w/Pinch Point Interlock
Electrical Requirements:	110V A.C.
Compressed Air Requirements:35 Cu. Ft. Free Air/Stroke @ 80 p.s.i.
Work Table:	Pre-Drilled Ground Steel (12" x 15")

STANDARD VARIATIONS AVAILABLE

- Specialty Code Conformance: NEMA, JIC, etc.
- Additional Throat Depth
- Longer Head Stroke
- Larger Work Table
- Larger Platen Sizes
- Expanded Dwell Timer Range
- Motor Driven Foil Advance

AUTOMATION AVAILABLE

- Auto Cycle Slide Table
- Rotary Index Table
- Automatic Parts Loading Systems
- Automatic Parts Removal Systems
- Special Protective Enclosures
- "Light Curtain" Operator Protection



HOT STAMPING MACHINES

117 DEAN AVENUE, FRANKLIN, MA 02038
TELEPHONE (508) 528-2021 • FAX (508) 520-7129 • EMAIL: thomsongroup@meganet.net

Made in U.S.A.

Appropriate safety devices should always be used. KF Kensol-Franklin will quote or advise on protective equipment for your application upon request.

