


| REV | DATE | CHANGE | TR NO. | REV BY. |
|-----|------|--------|--------|---------|
| | | | | |
| | | | | |



- NOTES:
1. COIL RELAY IS ACTIVATED ON THE FIRST MACHINE CYCLE AND STAYS ACTIVATED UNTIL MACHINE IS TURNED OFF.
 2. DC VOLTAGE IS ALWAYS ON.
 3. PULL CYCLE IS STARTED WHEN WIRE 26 IS PULLED TO 120VAC L BY RELAY ON MAIN PC BOARD.

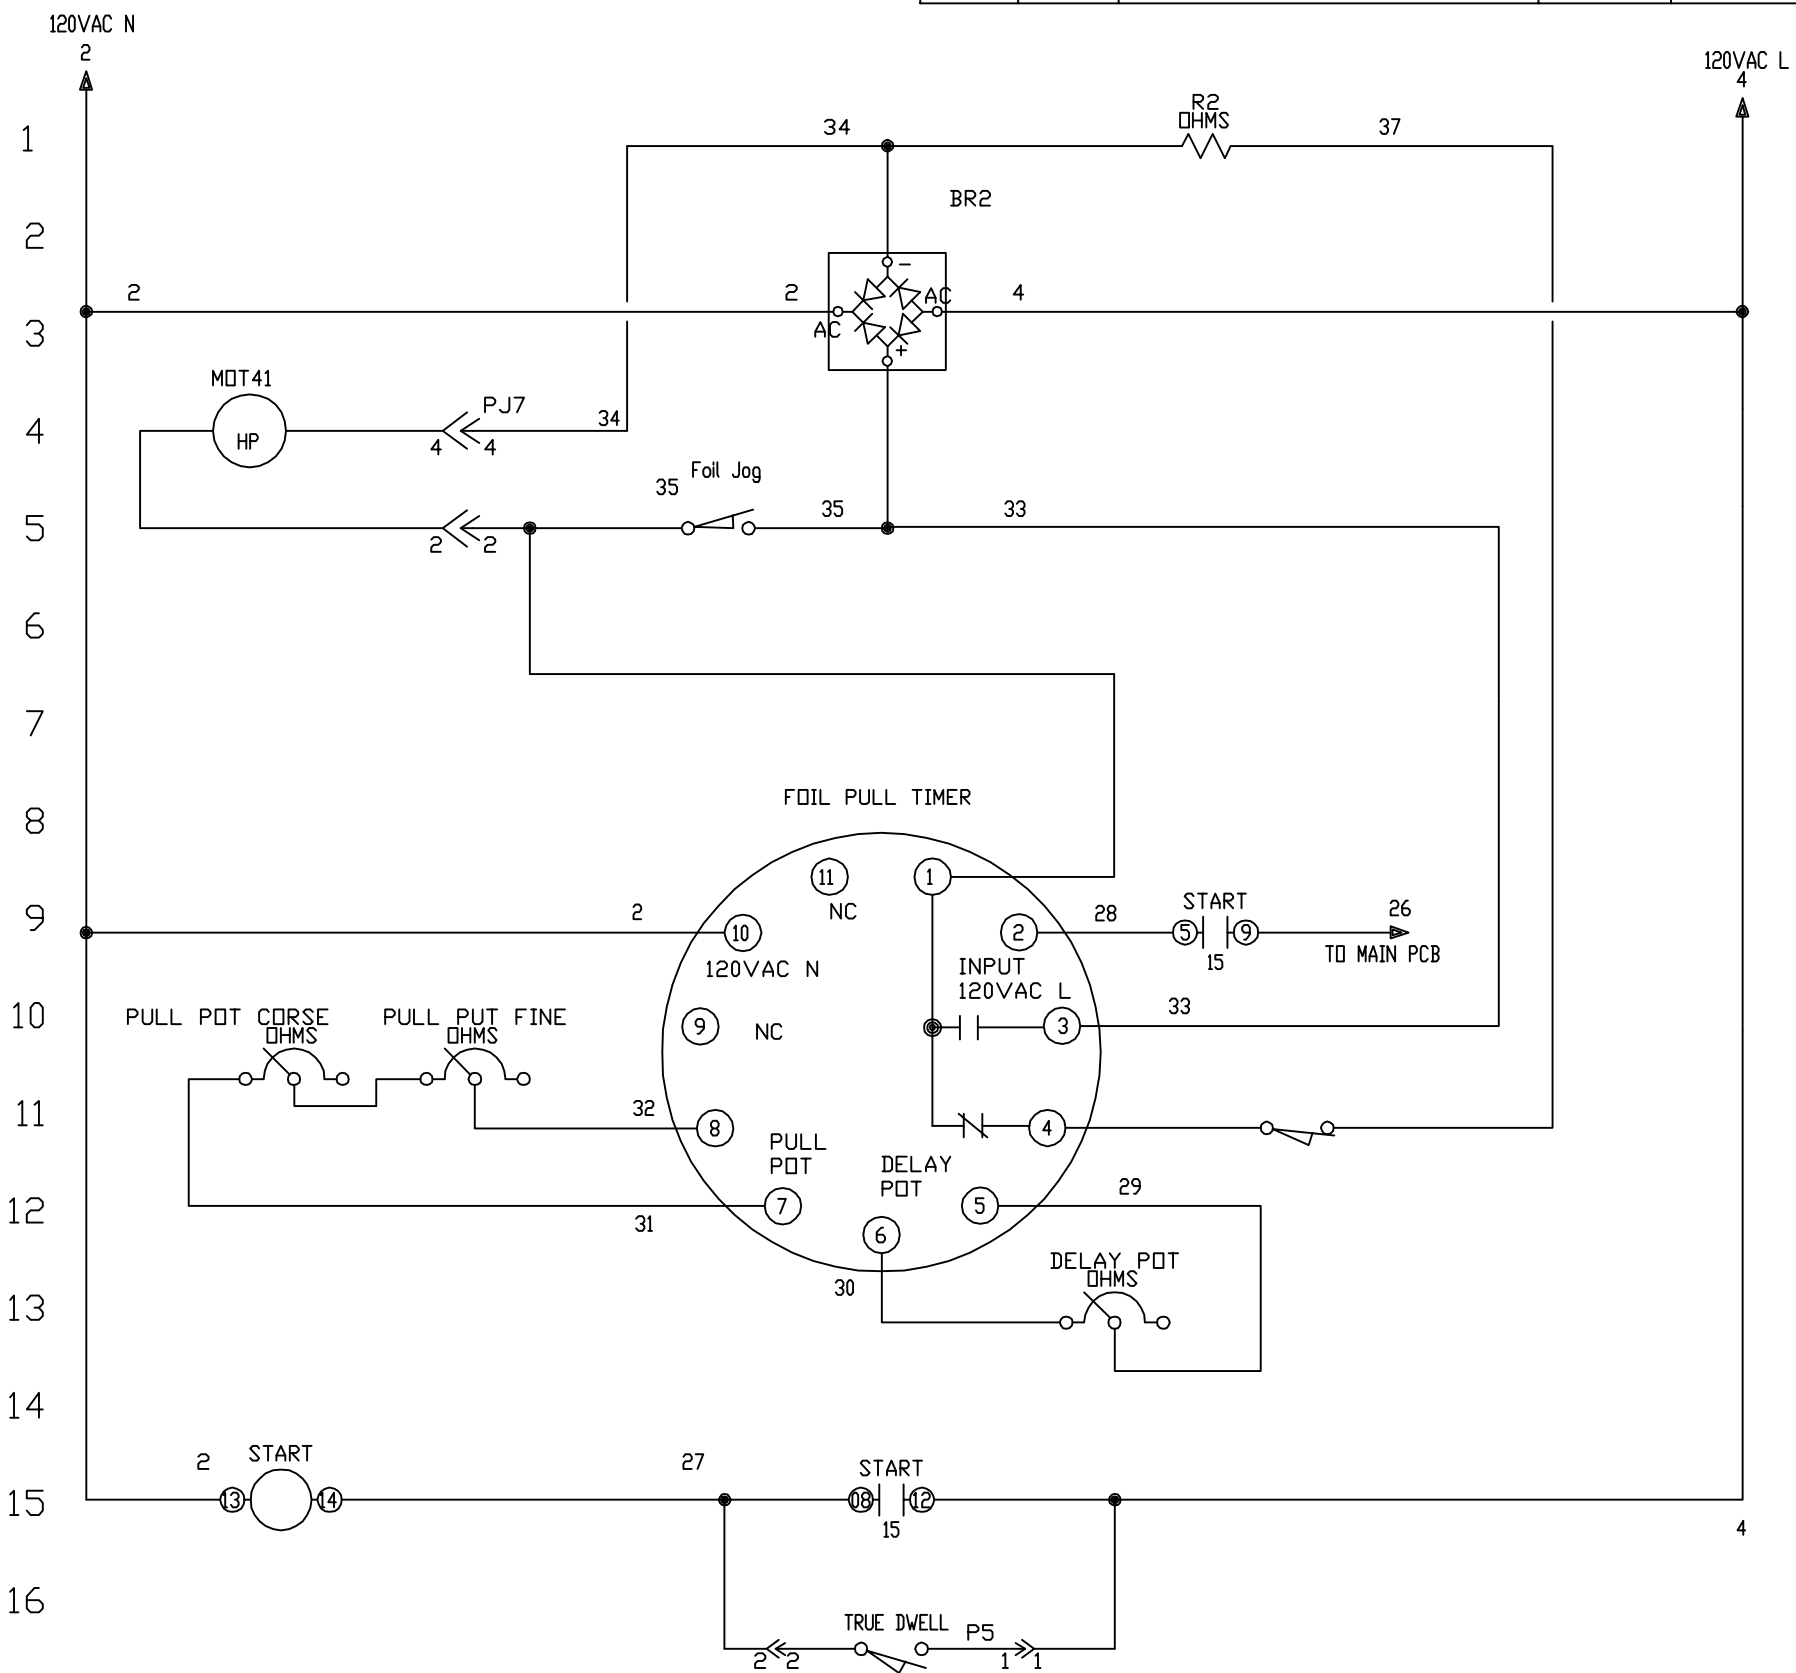

1313 E. Borchard Ave
Santa Ana, CA 92705

TITLE
FRANKLIN FOIL PULL TIMER
DIGITAL CONTROL BOX

DRAWING NO. 001-REVB SHEET 1 OF 1

DESIGNED BY IRWIN
DRAWN BY IRWIN
CHECKED BY C.S.I.
APPROVED BY C.S.I.

1

2

3

4

1

2

3

4